

CUJAM LED1X3600 D595 T740 OP • 1024750



Product:	Cujam LED1x3600 D595 T740 OP
Order code:	1024750
Family:	Cujam LED
Product group:	Vandeniui atsparūs ir švaros patalpų šviestuvai

GENERAL DATA

Description:	Surface mounted waterproof low-cost LED luminaire Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: polycarbonate Colour: white
Installation:	On the ceiling or wall (mounting brackets included), or suspended. Cable, 0.25m, 2x0.75mm2
Environment	Indoor
Application	public place, industry, warehouse, parking area

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	36
Power factor:	>0,95	Control gear:	ECG on/off
Connection:	Cable, 0.25m, 2x0.75mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	3600	System efficacy, lm/W:	100
CRI (Ra):	70+	CCT, K:	4000
SDCM:	5	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct	Beam angle, °:	133x107
LED lifetime, h:	25000/L70B50		


TECHNICAL DATA

Net weight, kg:	0.4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0038	Pallet quantity, pcs:	440
Dimensions, mm:	1200x60x35		


STANDARDS

Operating temperature range, °C:	ta -20...+40	Protection class IEC:	II
Ingress protection code:	IP65	Mechanical impact resistance:	IK07
EEC:	E	Certificates:	CE, RoHS
Warranty:	2 years		

Technical drawing (.jpg)

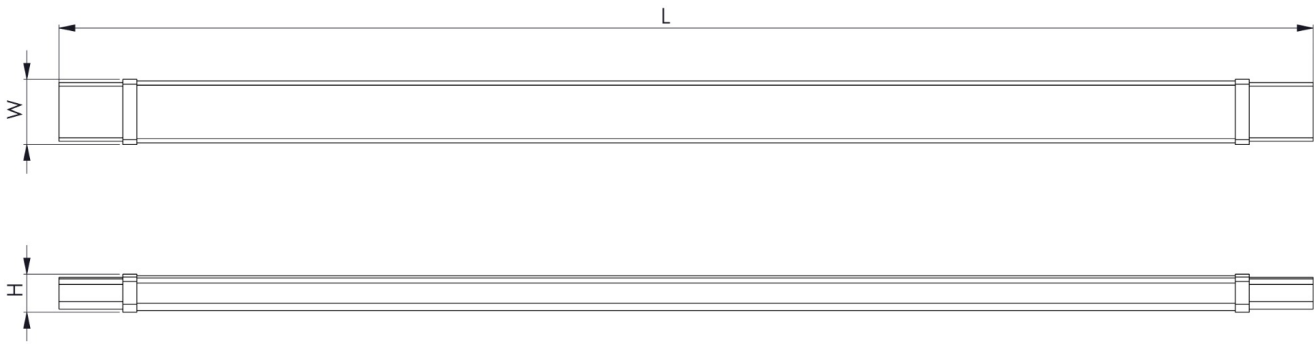

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification *note - luminaire is not suitable for frequent switching

Date of issue: 2023-05-19 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org